




ZetaLube


A New Lubricity Dimension
Evolved From Experience

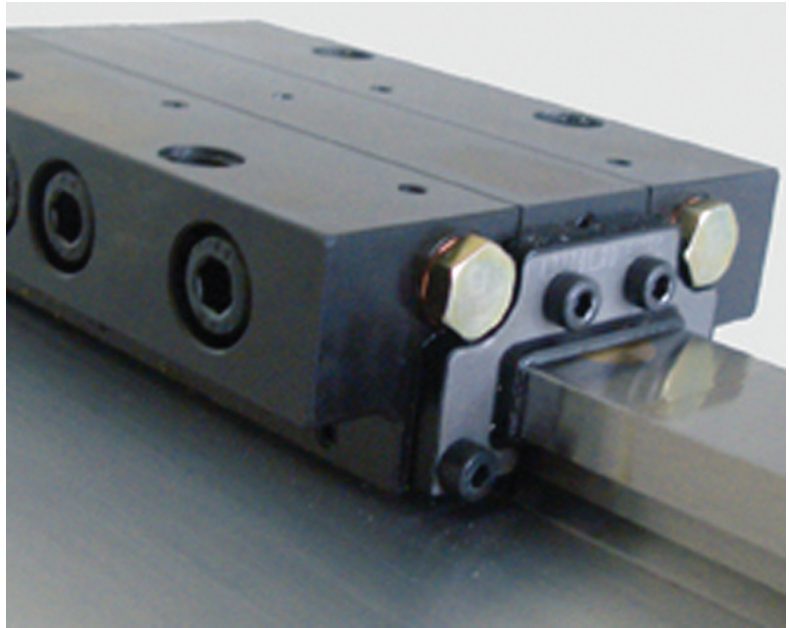

ZetaLube 225 Chain / Slideway Oil

Description

ZetaLube 225 is formulated with quality, high viscosity mineral oil and a package of additives that provides good load-carrying capability, high oxidation resistance, excellent corrosion protection, and special adhesiveness to resist wash-off from chain and slideway surfaces. It not only provides lubrication but also protection against rust and wears to chains and slideways of machineries/equipment.

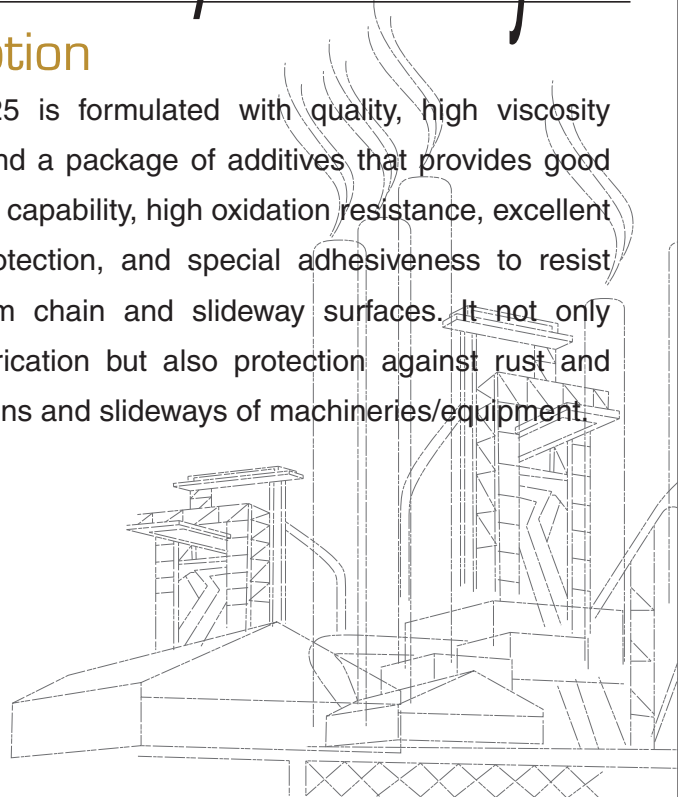

MAGNA INDUSTRIAL CO. LIMITED

Total Quality Maintenance

www.magnagroup.com

Magna Industrial reserves the right to modify or change this product for purpose of improving its performance characteristics ©2007 Magna Industrial Co. Limited .

The ZetaLube trade mark is the property of ITW, Inc. and is used under licence by Magna Industrial Co. Limited



Features and Benefits

- Good load-carrying performance to resist shock, load and impact – available in a range of viscosity grade for medium- to high-load carrying capabilities.
- High levels of adhesiveness and emulsion number offer extra protection to chains and slideways against water wash-off and subsequently rusting caused by moisture.
- Prevents stick-slip on machine slideways - optimizes the performance of machinery/equipment.
- High oxidation resistance – eliminates the formation of carbon residues and/or varnishes that are damaging to machinery/equipment.
- Provides excellent corrosion protection to the chains & slideways – ultimately extend machinery/equipment life.

Recommended Applications

- For lubrication of chains and machine ways subjected to high load and steam / moisture.
- Suitable for use on:
 - Slideway of machine tools such as lathes, drilling and tapping machines, etc. exposed to high loads.
 - Chain drives, conveyor chains, etc.
- For gears, bearings and/or machine parts where tacky oil is required.

Typical Data

| TEST | ISO VG 68 | ISO VG 100 | ISO VG 150 |
|--------------------------------|-----------|------------|------------|
| Density, kg/L @ 20°C | 0.872 | 0.875 | 0.878 |
| Viscosity, cSt @ 40°C | 68 | 100 | 150 |
| Flash Point (Open Cup), °C(°F) | >230 | >230 | >230 |
| Pour Point °C(°F) | -11 | -10 | -10 |
| Copper Strip Test | 1b | 1b | 1b |

The data shown are typical value and may vary.

Pack-size

205 Litre Metal Drum & 20 Litre Plastic Container

Authorized Distributor